




# RIG 3

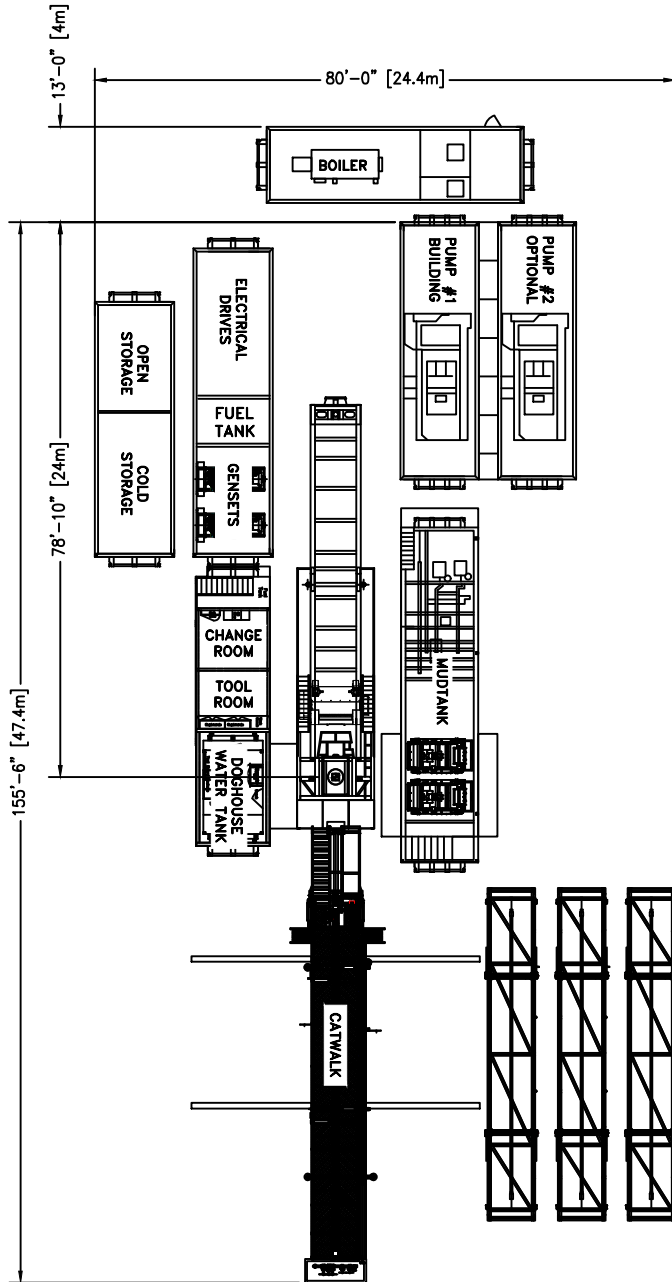

9,100FT (2800m)  
W/ 4" DRILL PIPE  
STIFF MAST RING III SINGLE  
5,000psi CIRCULATING SYSTEM

### DRAWWORKS

RIGMASTER E30AC  
OEM 600HP AC TRACTION MOTOR

### SUBSTRUCTURE

FOREMOST TRAILER  
24 WHEEL  
ROTARY CAPACITY: 88,960daN (200,000LB)  
FLOOR HEIGHT: 3.35m (11'-0")  
ROTARY TABLE: ENID 406mm (16") HYDRAULIC FOR POSITIONING  
DETROIT S60 HPU

### MAST

24.6m (80') FOREMOST TWIN BOOM RING III  
RATING: 102,300daN (230,000LB) 6 LINES

### OVERHEAD EQUIPMENT

FOREMOST 150 TON INTEGRATED BLOCK

### TOP DRIVE

FOREMOST 150T HYDRAULIC  
TORQUE: 21,000FT/LBS LOW GEAR, 6,000FT/LBS HIGH GEAR

### MUDPUMPS (x2)

(1) MD-9 1000HP  
1150HP AC TRACTION MOTOR VFD DRIVE  
(2) MD-9 1000HP  
CATERPILLAR C27 1050HP @ 1800RPM

### MUDTANKS

TOTAL VOLUME: 65m<sup>3</sup> (400BBL)  
4 COMPARTMENTS  
2 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS  
SHAKERS: (2) MI SWACO MONGOOSE

### B.O.P.'S/MANIFOLD

279mm (11") CTI  
RATING: 21,000kpa (3,000psi)  
NACE TRIM  
50.8mm (2") x 35,000kpa (5,000psi) MANIFOLD  
76.2mm (3") GUTLINE

### GEN SETS (2)

DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR  
500kw 600v 100amp SERVICE  
1000HP VFD PUMP DRIVE  
600HP VFD DRAWWORKS DRIVE

### ACCUMULATOR

MANUFACTURER: CONTROL TECHNOLOGY  
21,000kpa (3,000psi)  
5-FUNCTION, 2-STATION PLC

### BOILER

MANUFACTURER: INDECK  
80HP DOUBLE PASS  
6,000L (1600GAL) FUEL STORAGE

### MISC

FUEL CAPACITY: 18,500L (4,900 GALLONS)  
WATER TANK CAPACITY: 50m<sup>3</sup> (315BBL)  
LOADER ACCESSIBLE PIPE TUBS  
HYDRAULIC CATWALK W/ POWERED SKATE  
LOADER  
PIPE SPINNER

### TUBULARS

HW DRILL PIPE: 101.6mm (4")  
44kg/m (29.7LB/FT), 50 JOINTS RING II  
DRILL COLLARS: 165mm (6 1/2") 4 1/2" XH (NC46),  
136kg/m (92LB/FT), 8 JOINTS

DRILL PIPE: 127mm (5") 4 1/2" IF (NC50)  
150 JOINTS AVAILABLE UPON REQUEST