




RIG 6

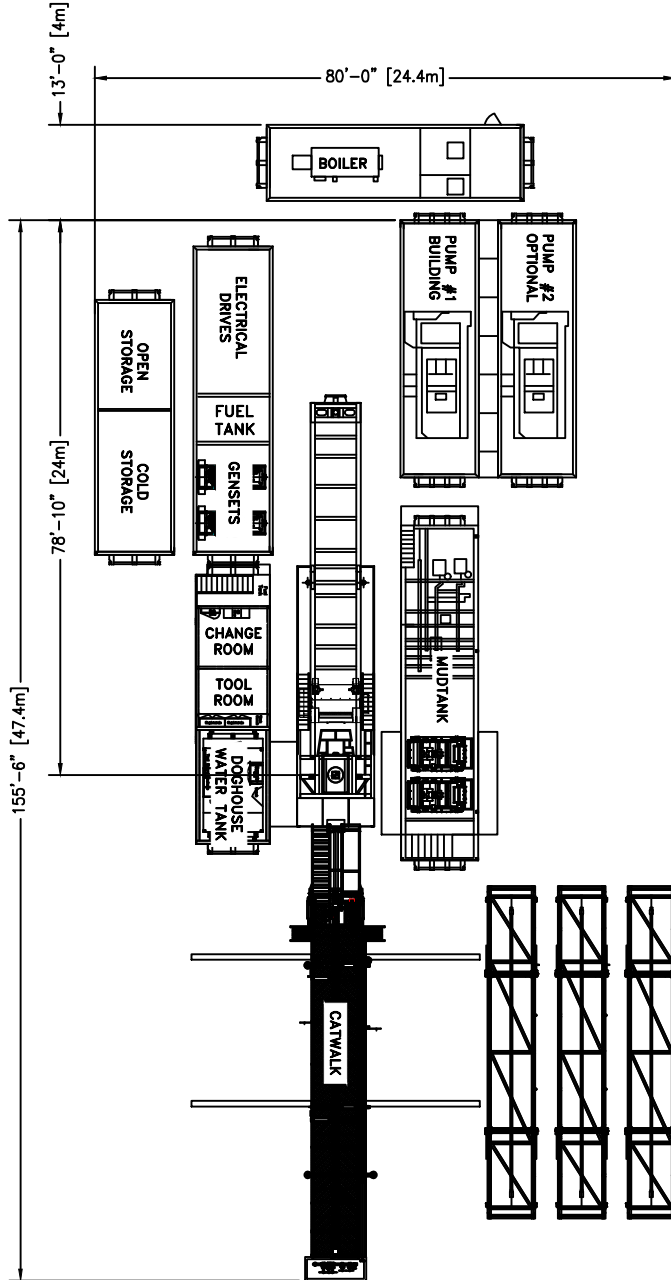

9,100FT (2800m)
 W/ 4" DRILL PIPE
 STIFF MAST RING III SINGLE
 5,000psi CIRCULATING SYSTEM

DRAWWORKS
 RIGMASTER E30AC
 OEM 600HP AC TRACTION MOTOR

SUBSTRUCTURE
 FOREMOST TRAILER
 ROTARY CAPACITY: 88,960daN (200,000LB)
 FLOOR HEIGHT: 3.35m (11'-0")
 ROTARY TABLE: ENID 406mm (16") HYDRAULIC FOR POSITIONING
 DETROIT S60 HPU

MAST
 24.6m (80') FOREMOST TWIN BOOM RING III
 RATING: 102,300daN (230,000LB) 6 LINES

OVERHEAD EQUIPMENT
 FOREMOST 150 TON INTEGRATED BLOCK

TOP DRIVE
 FOREMOST 150T HYDRAULIC
 TORQUE: 21,000FT/LBS LOW GEAR, 6,000FT/LBS HIGH GEAR

MUDPUMPS (x2)
 (1) MD-9 1000HP
 1150HP AC TRACTION MOTOR VFD DRIVE
 (2) MD-9 1000HP
 CATERPILLAR C27 1050HP @ 1800RPM

MUDTANKS
 TOTAL VOLUME: 65m³ (400BBL)
 4 COMPARTMENTS
 2 AGITATORS, (2) 5x6x11 MISSION MIXING PUMPS
 SHAKERS: (2) MI SWACO MONGOOSE

B.O.P.'S/MANIFOLD
 229mm (9") CTI
 RATING: 21,000kpa (3,000psi)
 NACE TRIM
 50.8mm (2") x 35,000kpa (5,000psi) MANIFOLD
 76.2mm (3") GUTLINE

GEN SETS (2)
 DETROIT 60 SERIES 60 W/ STAMFORD GENERATOR
 500kw 600v 100amp SERVICE
 1000HP VFD PUMP DRIVE
 600HP VFD DRAWWORKS DRIVE

ACCUMULATOR
 MANUFACTURER: CONTROL TECHNOLOGY
 21,000kpa (3,000psi)
 5-FUNCTION, 2-STATION PLC

BOILER
 MANUFACTURER: WILLIAM AND DAVIES
 100HP DOUBLE PASS
 10,000L (2200GAL) FUEL STORAGE

MISC
 FUEL CAPACITY: 18,500L (4,900 GALLONS)
 WATER TANK CAPACITY: 50m³ (315BBL)
 LOADER ACCESSIBLE PIPE TUBS
 HYDRAULIC CATWALK W/ POWERED SKATE
 LOADER
 PIPE SPINNER
 11" BOP STACK AVAILABLE UPON REQUEST

TUBULARS
 DRILL PIPE: 101.6mm (4") 4"FH (NC40),
 24kg/m (15.7LB/FT) X-95, 168 JOINTS RING III
 HW DRILL PIPE: 101.6mm (4") 4"FH (NC40),
 44kg/m (29.7LB/FT), 35 JOINTS RING III
 101.6mm (4"),
 44kg/m (29.7LB/FT), 15 JOINTS RING II
 DRILL COLLARS: 159mm (6 1/4") 4 1/2" XH (NC46),
 136kg/m (92LB/FT), 8 JOINTS
 DRILL PIPE: 101.6mm (4") XT39
 21kg/m (14LB/FT) S-135
 150 JOINTS RING III AVAILABLE UPON REQUEST
 DRILL PIPE: 127mm (5") 4 1/2" IF (NC50)
 150 JOINTS AVAILABLE UPON REQUEST